




UTEPO 24 Ports PoE Injector

PoE+ PSE UTP7224E-PSE


PoE management / Industrial grade / Easy Installation



KEY FEATURES


- 24* 10/ 100Mbps PoE ports;
- PoE & PoE +; each PoE power supply up to 30W ;
- Web management software, easy to manage;
- Total power supply up to 430W;
- Excellent anti-interference and electromagnetic compatibility:
2 KV lightning protection, Level 3 ESD & 2KV pulse wave;
- Standard 19-inch/1U case,
convenient for din-rail and desktop installation.
- Good object in complex environments

APPLICATION

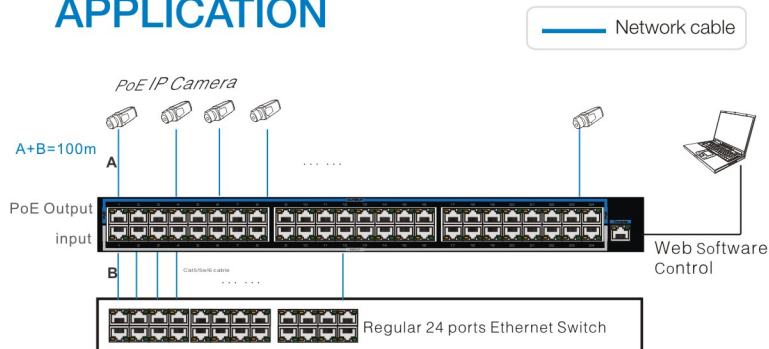


BOARD DIAGRAM

Front Board

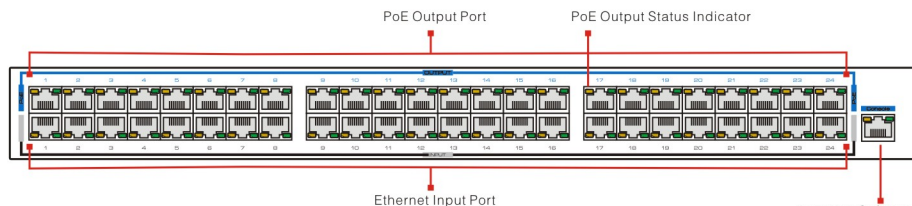

Back Board

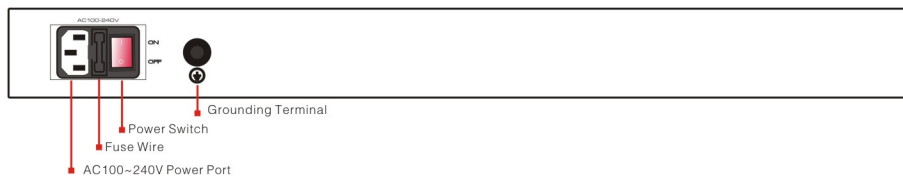

SPECIFICATIONS

Item	Description	
Power	Power Supply	Electric Power Supply
	Voltage Range	AC100V ~ 240V
	Consumption	430W
Ethernet Port	Ethernet Port	Input 1 ~ 24 Port: 10/100Mbps Ethernet Port Output POE 1 ~ 24 Port: 10/100Mbps PoE Ethernet Port
	Transmission Distance	0 ~ 100m
	PoE Protocol	IEEE802.3af, IEEE802.3at Protocol
	PoE Power Supply	End-Span
Network Switch	PoE Consumption	Single Port ≤ 25W, Maximum PoE Output Consumption ≤ 400W
	Network Standard	IEEE802.3 10BASE-T, IEEE802.3u 100BASE-TX, IEEE802.3ab 1000BASE-TX; IEEE802.3z 1000-SX/LX; IEEE802.3 X
LED Indicator	Power	Power (Red)
	POE	Output: Yellow LED on RJ45 socket to indicate PoE status
Protection	ESD	1a Contact Discharge Level 3 1b Air Discharge Level 3 Per: IEC61000-4-2
	Lightning Protection	Power: 2KV Signal: 1KV Per: IEC61000-4-5
Environmental	Working Temperature	0°C~55°C
	Storage Temperature	-20°C~70°C
	Humidity (Non-Condensing)	0~95%
Mechanical	Dimension (L*W*H)	420mm × 217mm × 44mm
	Material	aluminum panels + galvanized sheet
	Color	Black
	Weight	3.65kg