

Overview

This series contains these types as follow:

- UTP7204GE: Industrial 4-Port Gigabit 2-Port Gigabit SFP 2-Port Gigabit RJ-45 (1-Port Gigabit Combo) Ethernet Switch
- UTP7204GE-POE: Industrial 4-Port Gigabit PoE+ 2-Port Gigabit SFP 2-Port Gigabit RJ-45 (1-Port Gigabit Combo) Ethernet Switch
- UTP7204GE-HPOE: Industrial 1-Port Gigabit HPoE 3-Port Gigabit PoE+ 2-Port Gigabit SFP 2-Port Gigabit RJ-45 (1-Port Gigabit Combo) Ethernet Switch

This series switches provide 4*1000M Ethernet RJ-45 downlink ports, 2*1000M Ethernet SFP and 2*1000M Ethernet RJ-45 (1*1000M RJ45/SFP combo port) uplink port. PoE switch meets IEEE 802.3af/at standard, UTP7204GE-POE can deliver up to 30W power per downlink port, UTP7204GE-HPOE can deliver up to 60W power for port 1 and 30W power for ports 2 to 4 each downlink ports.

It is easy to use, Plug-and-Play, can be widely used in video security monitoring system, network project, etc.

Features and Highlights

Abundant Interfaces

- 4*10/100/1000BASE-T RJ-45(Auto MDI/MDI-X)
- 1*10/100/1000BASE-T RJ-45(Auto-MDI/MDI-X)
- 1*1000BASE-X SFP
- 1*1000M RJ-45/SFP Combo

Industrial Design

- Working temperature: -40°C~75°C
- Redundant power supply
- 6kV surge immunity
- 6kV contact discharge, 8kV air discharge ESD protection
- Fan-less metal shell design
- DIN-rail/desktop/wall mounted installation



UTP7204GE



UTP7204GE-POE, UTP7204GE-HPOE


Specifications

Items	UTP7204GE	UTP7204GE-POE	UTP7204GE-HPOE
Hardware Specifications			
Downlink Port	4*10/100/1000BASE-T RJ-45 (Auto-MDI/MDI-X)	4*10/100/1000BASE-T PoE+ RJ-45(Auto-MDI/MDI-X)	4*10/100/1000BASE-T PoE+ RJ-45(Auto-MDI/MDI-X)
Uplink Port	1*1000M RJ-45/SFP Combo 1*10/100/1000BASE-T RJ-45(Auto-MDI/MDI-X) 1*1000BASE-X SFP		
LED Indicators	1*Power, power indicator		
	2*Fiber Link, SFP port indicators		
Dimensions (W*D*H)	163mm*110.5mm*46.5mm		
Input Voltage	UTP7204GE: 12~57V DC UTP7204GE-POE, UTP7204GE-HPOE: 48~57V DC		
Power Consumption	≤6W (Full load without PoE)		
Material	Metal shell		
Installation	DIN-rail/Desktop/Wall mounted		
Switch Property			
Standards	IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3z		
Forwarding Modes	Store and Forward		
MAC Table	8k, support auto learning		
Switching Capacity	14Gbps/non-blocking		
Packet Forwarding Rate	10.42Mpps		
Packet Buffer	1M		
Jumbo Frame	10k Bytes		
Power Supply			
PoE Standard	/	IEEE 802.3af/at(PSE)	
PoE Power Supply Type	/	End-span	
PoE Pin Assignment	/	1/2 (+),3/6 (-)	
PoE Budget	/	30W max for each port	60W PoE for port 1, 30W PoE for other ports
Reliability			
Surge Immunity	6kV, Standard: IEC6000-4-5		
ESD Protection	6kV Contact Discharge, 8kV Air Discharge, standard: IEC61000-4-2		
Operating	-40°C ~75°C, 5%~95% (Non-condensation)		
Storage	-40°C ~85°C, 5%~95% (Non-condensation)		

Appearances and Dimensions



UTP7204GE, UTP7204GE-POE, UTP7204GE-HPOE

Dimensions(mm)

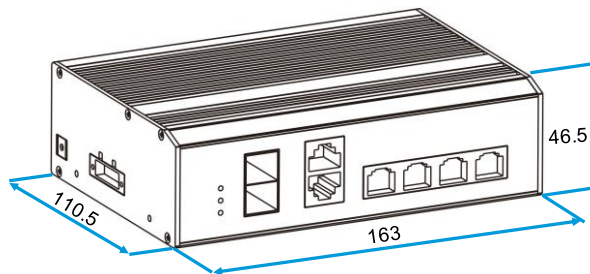



UTP7204GE Front Panel

UTP7204GE-POE,UTP7204GE-HPOE Front Panel

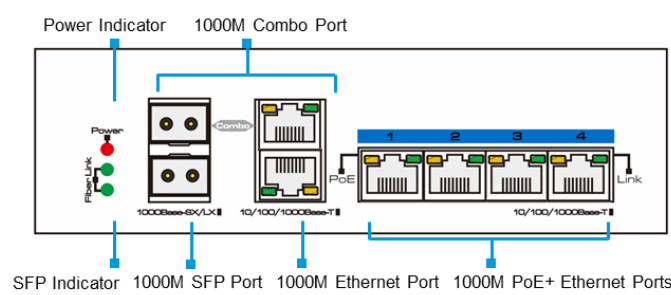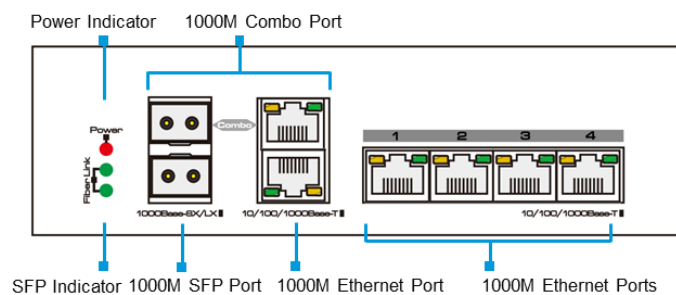

UTP7204GE Side Panel

UTP7204GE-POE,UTP7204GE-HPOE Side Panel

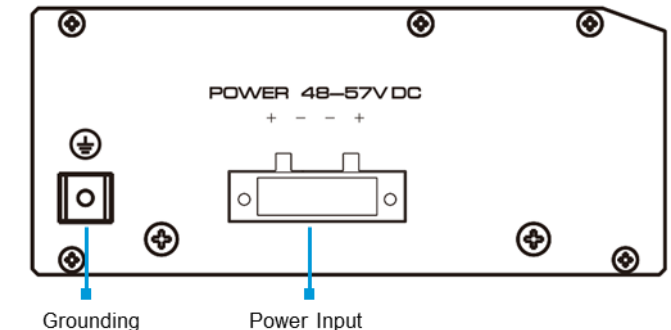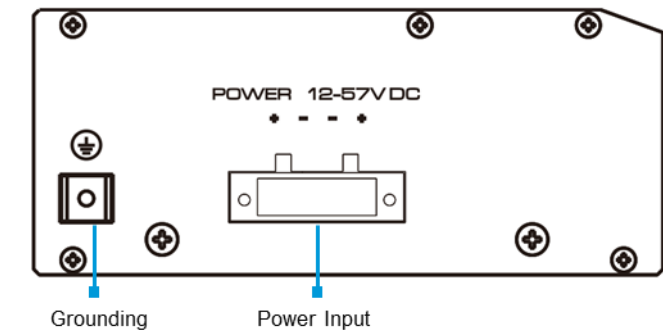

Packing List

Welcome to order our products. After purchasing, you will receive:

Item	Quantity
Switch	1 pc
Power Adapter (optional)	1 pc
Mounting Accessory	1 set
Quick Installation Guide	1 pc

More Information

For more information, please visit:

www.utepo.net

SHENZHEN UTEPO TECH LTD.

Head quarter: 5F, Building B, Tiange Science and Technology Park, NO.2, Luozu Industrial Avenue, Shi'yan Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755-83898016-863 or +86-1501-2669-765 (Sales)

Email: info@utepo.net (Sales), support@utepo.net (Technical support)

©2023 SHENZHEN UTEPO TECH LTD. All Rights Reserved.

Version, V2.1, updated 2023-07-06.

The information in this document is subject to change without notice.

Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.