

# PoE to USB-C Digital Power & Data Adapter

## Quick Installation Guide

### Packing List

Please check the following items after unpacking, if any missing, please contact your local dealer.

Items	Quantity
Digital Power & Data Adapter	1
Quick Installation Guide	1

### Product Overview


The product is PoE to USB-C Digital Power & Data Adapter. It meets IEEE 802.3af standard, which adopts safe low-voltage input. USB-C can provide your mobile devices with a safe quick charge and network at the same time.

### Features

- IEEE 802.3af
- USB-C: up to 5V/2A quick charge, compatible with PD3.0, 100Mbps network

### Appearance

#### Appearance

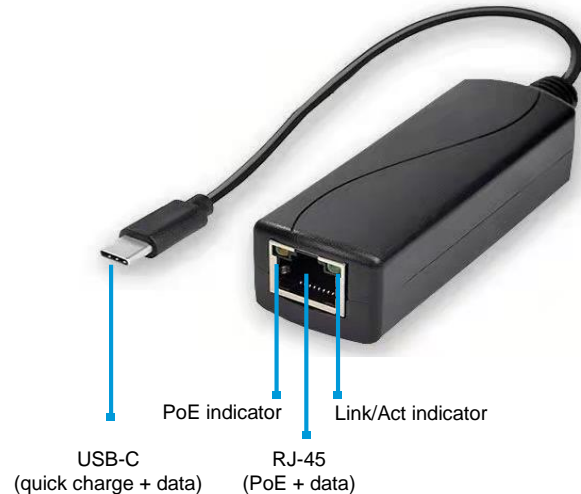

### Indicator

Indicator	Status	Description
PoE indicator	Solid orange	The port is supplying PoE normally.
	Off	The port stops supplying PoE.
Link/Act indicator	Solid green	The port is linking normally.
	Blinking green	The port is transmitting or receiving data.
	Off	The port links down.

### Specifications

Items	
Hardware specifications	
Interface	1*10/100Base-T PoE RJ-45(Auto-MDI/MDI-X) 1*100Mbps Type-C USB2.0
Output	5V/2A DC
Material	Plastic
PoE	
PoE Standard	IEEE 802.3af
PoE Pin Assignment	1/2(+), 3/6(-)
Reliability	
Operating	0°C ~40°C, 5%~95%(Non-condensation)
Storage	-10°C ~50°C, 5%~95%(Non-condensation)

### Caution

- Please find the following solution when the device doesn't work. Please confirm if the installation is correct:
- Please confirm if the RJ45 cable order in accordance with the EIA/TIA568A or 568B industry standards.
  - Please do not connect the network device which consumption exceeds the maximum output consumption of the port.
  - Please replace a normal device with a failure one to check if the device is broken.
  - Some old mobile phone models, such as Apple mobile phones or Android mobile phones, cannot access the Internet, because the mobile phone system does not have the corresponding network card driver.
  - If the problem still exists, please contact the factory.

Version: V1.0, updated 2022.8.26.

The information in this document is subject to change without notice.

Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.