

## UTP101P-HD




- Passive, no power required;
- Plug-and-play; Real-time and stable HDCVI/HDTVI/AHD/Analog transmission result;
- 500m matches the passive transceiver; 650m matches active transceiver;
- Excellent anti-interference , surge protection, ESD and lightning protection capability;
- ABS (Acrylonitrile-Butadiene-Styrene) shell; built-in extended coaxial cable, convenient for intensive engineering projects;
- Bayonet Nut Connector (BNC); press-fitting UTP terminal.



## Specification

Item	UTP101P-HD
Video Port	1 channel
Maximum Transmission Distance (with passive product)	<b>HDCVI</b> -720P:370m;1080P:200m; 400W(4MP):350m;800W(8MP):150m <b>HDTVI</b> -720P:200m;1080P:200m; 300W(3MP):250m; <b>AHD</b> -720P/960P: 330m; 1080P:300m 400W(4MP): 250m;500W(5MP): 200m <b>Analog Video</b> :500m;
Coaxial Video Port	Male BNC Port
Twisted-pair Video Port	2-channel screw push terminal
Video Compatibility	HDCVI/HDTVI/AHD, PAL/NTSC/SECAM Video
Bandwidth	0 ~ 75MHz
Anti-interference	> 60dB
Surge Protection	6KV(different mode) Per: IEC61000-4-5
ESD	Level 3,1a Contact Discharge, Level 3,1b Air Discharge
Working Temperature	-10 ~ 55°C
Storage Temperature	-20°C~70°C
Humidity ( Non-condensing )	0 ~ 95%
Out Shell	ABS
Weight	23g

## Application

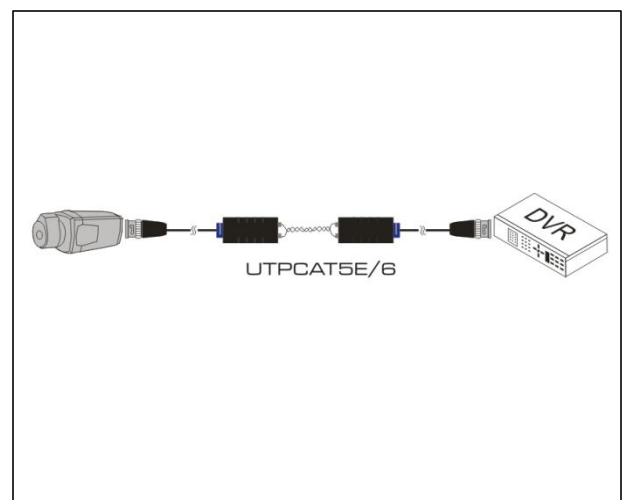

## Package List

Designation	Quantity
UTP101P-HD	2
User Manual	1

## Related Products

Designation	Model
Passive Analog HD-Video UTP Transceiver	UTP101P-HD1
Passive Analog HD-Video UTP Transceiver	UTP101P-HD2
Passive Analog HD-Video UTP Transceiver	UTP101P-HD4